

# MENUMASTER<sup>®</sup> Commercial

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



Left to right: MRC window door style and MRC solid door style (\*S2D)

## Chef Line | Heavy Volume This category of microwave oven is ideal for...

### Applications

- Full service restaurants
- Prep stations
- Delis
- Quick service restaurants
- Casual dining
- Schools
- Healthcare
- Grocery Stores
- Food courts

### Through put potential by oven wattage (items per hour)

Food item	1700W	2200W	3000W
Steamed Shrimp (1lb (454g))	31	36	48
Fresh Green Beans (12oz (340g))	36	42	55
1 Baked Potato (10oz (283g))	24	30	36
Salmon (6oz (170g))	27	31	33
Lobster Tail (4oz (114g))	23	25	31
Quinoa (1cup (150g))	5	5	6
Steamed Rice (8cups (1.2kg))	3	5	6
Berry Cobbler (7oz (200g))	65	80	120

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times:  
[testkitchen@acpsolutions.com](mailto:testkitchen@acpsolutions.com)



## Heavy Volume Menumaster<sup>®</sup> Commercial MRC Series

### Power Output

- 1700-3000 Watts of power
- Unique method of microwave energy distribution provides superior even heating throughout the entire cavity

### Multi-language universal operation, with programming flexibility

- Oven interface and programming software supports 20 languages
- Smart USB connectivity standard
- Compatible with ACP Programming Application
- Stores up to 100 programmable menu items

### Easy to Use

- 11 power levels and 4 cooking stages for cooking flexibility
- Multiple quantity function automatically calculates cooking times for multiple portions
- Automatic Voltage Sensor adjusts to the power supply (*North America & Korea only*)
- See-through door and lighted interior for monitoring without opening the door (*\*S2D Models excluded*)
- Ample 1 cubic ft. (28 liter) capacity accommodates two standard 4" (102mm) deep half-sized pans
- Stackable to save valuable counter space (*\*3000W models excluded*)

### Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and increased durability
- Removable, cleanable air filter protects oven components
- Constructed to withstand the foodservice environment
- Interior borosilicate tray is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained

### Optional Accessories

- Cavity shelf (SE10)
- Stainless cart/equipment stands: (CA24, CA30)
- Non-stick baskets (NB10/S, TB10/S, SB10/S, MB10/S)
- Oven Cleaner and Shield Protectant (CL10\*\*, SH10\*\*)

### Service

All products are backed by the ACP, Inc.  
24/7 ComServ Support Center

### Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at [www.acpsolutions.com/warranty](http://www.acpsolutions.com/warranty)

### Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, FDA, CE, Korea Certification (KC), and National Institute of Metrology, Quality and Technology (INMETRO).




\*\*Only shipped in U.S.A.



© 2020 ACP, Inc.  
Cedar Rapids, Iowa 52404

# MenuMaster® Commercial Microwave MRC Series | Heavy Volume

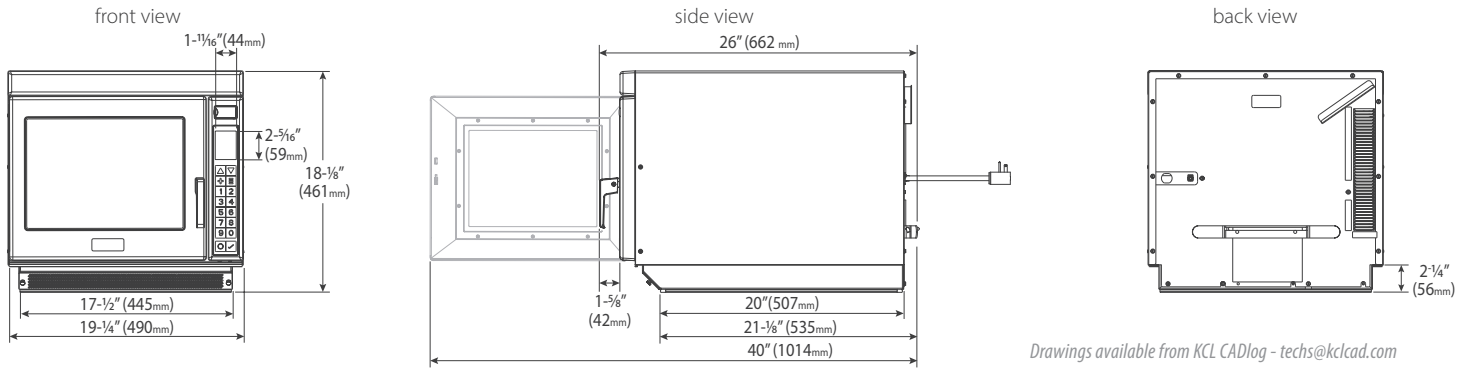

Drawings available from KCL CADlog - techs@kclcad.com

## Dimensions

<b>Exterior</b>	H 18 1/8" (461)	W 19 1/4" (490)	D† 26" (662)
<b>Cavity</b>	H 8 1/2" (216)	W 13" (330)	D 15" (381)
<b>Usable Cavity Space</b>	1.0 cubic ft. (28 liter)		
<b>Door Depth</b>	40" (1014), 90°+ door open		
<b>Installation Clearance</b>	Top: 2" (51)	Sides: 1" (25)	Back: None
<b>Shipping Carton</b>			
2 × Magnetron Models	H 21 1/2" (546)	W 21 3/4" (553)	D 28 1/4" (718)
3 × Magnetron Models	H 21 1/2" (546)	W 21 3/4" (553)	D 30" (762)

## Weight

<b>Model Type</b>	<b>Product Weight</b>	<b>Ship weight (approx.)</b>
2 × Magnetron	94 lbs. (43 kg.)	101 lbs. (46 Kg.)
3 × Magnetron	115 lbs. (52 kg.)	123 lbs. (56 Kg.)

Measurements are US Standard. Measurements in ( ) are in millimeters.

\* IEC 60705 Tested

† Includes handle

## Features

<b>Configuration</b>	Countertop
<b>Display</b>	2.8" (71mm) Color LCD
<b>USB Port</b>	Yes
<b>Control System</b>	Touchpad
<b>Programmable Control</b>	Yes, 10 pads
<b>Braille</b>	Overlay available
<b>Settings Programmable</b>	100
<b>Max. Cooking Time</b>	60:00
<b>Microwave Distribution</b>	2 × Magnetron Models: 2 rotating antennas–1 top; 1 bottom 3 × Magnetron Models: 3 rotating antennas–2 top; 1 bottom
<b>Power Levels</b>	11
<b>Defrost</b>	Yes, power level 2
<b>Time Entry Option</b>	Yes
<b>Multiple Portion Setting</b>	Yes, X2 by default, optional up to X9
<b>Stage Cooking</b>	4 stages
<b>Interior Light</b>	Window Door Style: Yes, LED Solid Door Style: No
<b>Air Filter</b>	Yes, 1 removable with cleaning reminder
<b>Signal</b>	End of cycle, adjustable
<b>Door Handle</b>	Lift & Pull
<b>Exterior Finish</b>	Stainless steel
<b>Interior Finish</b>	Stainless steel with sealed-in borosilicate tray

## Electrical Configuration

Region	Model#/UPC	Automatic Voltage Sensor	Door Style	Stackable	Power Consumption	Power Output (microwave)	Power Source	Plug Configuration	Cord Length	Frequency	Magnetron
North America single phase	<b>MRC17S2</b> 728028020663	Yes	Window	Yes	2700W, 13.8A	1700W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	2
North America single phase	<b>MRC17S2D</b> 728028470666	Yes	Solid	Yes	2700W, 13.8A	1700W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	2
North America single phase	<b>MRC22S2</b> 728028020670	Yes	Window	Yes	3200W, 15.4A	2200W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	2
North America single phase	<b>MRC22S2D</b> 728028470673	Yes	Solid	Yes	3200W, 15.4A	2200W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	2
North America single phase	<b>MRC30S2</b> 728028020687	Yes	Window	No	4400W, 21.2A	3000W*	208/240V, 60Hz, 30A, single phase	NEMA 6-30P	5 ft. (1.5m)	2450MHz	3
North America single phase	<b>MRC30S2D</b> 728028470680	Yes	Solid	No	4400W, 21.2A	3000W*	208/240V, 60Hz, 30A, single phase	NEMA 6-30P	5 ft. (1.5m)	2450MHz	3
Brazil single phase	<b>MRC17S2B</b> 728028244434	No	Window	Yes	2700W, 13A	1700W*	220V, 60Hz, 15A, single phase	TYPE YP-05 NBR 14136	5 ft. (1.5m)	2450MHz	2
Korea single phase	<b>MRC17S2K</b> 728028377088	Yes	Window	Yes	2700W, 13A	1700W*	208/240V, 60Hz, 15A, single phase	KS approved Type F	5 ft. (1.5m)	2450MHz	2
Saudi Arabia single phase	<b>MRC17S2SA</b> 728028315790	No	Window	Yes	2700W, 11.9A	1700W*	220V, 60Hz, 13A, single phase	BS1363/A	5.5 ft. (1.7m)	2450MHz	2



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.  
800-233-2366 • 319-368-8120 • Fax: 319-368-8198  
www.acpsolutions.com

Part No. 20271602

Updated 2/25/2020

© 2020 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence

Specification #:

AIA File #: